

17.10.03



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

REC'D 23 OCT 2003

WIPO PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079527.4

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

BEST AVAILABLE COPY

R C van Dijk



Anmeldung Nr:
Application no.: 02079527.4
Demande no:

Anmeldetag:
Date of filing: 29.10.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

A coordinate measuring device with a vibration damping system

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G01B7/012

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

A coordinate measuring device with a vibration damping system

EPO - DG 1

29. 10. 2002



The invention is related to a coordinate measuring device having a probe comprising a stylus with a sensing member for contacting the object to be measured, a support unit to which the stylus is connected through elastic means, and magnet means for damping vibrations of the stylus by generating eddy currents in conductive material.

5

Such device is disclosed in DE-A-19731005, in which device the elastic means consist of two spring elements, each allowing a movement of the sensing member in one direction. Each spring element is provided with a piece of conductive material positioned in a magnetic field, so that movement of the conductive material generates eddy currents in it, resulting in a damping action on that movement.

In coordinate measuring devices often mechanical touch probes are used. Such probe can be provided with a stylus comprising a high precision sphere at its end, usually made of sapphire. Through the sensing member contact can be made between the stylus and the object to be measured. The location (i.e. three coordinates) of a certain spot on the surface of the object can be measured by detecting the position of the sensing member relative to the support unit, when it is in contact with that spot, provided that the position of the support unit with respect to the object is known.

Detection of the position of the sensing member means that the location (three coordinates) of the sensing member is measured, and furthermore that the orientation (three angles) of the sensing member is measured. So, the position of the sensing member is defined by six degrees of freedom. To measure said position the stylus can be provided with a detection member which is detected by detection means attached to the support unit.

The collision of the sensing member with the object may introduce vibration of the stylus with respect to the support unit, since the stylus is connected to the support unit by said elastic means. Such vibrations may introduce measuring errors, and to decrease these errors a certain settling time is required during which the vibration is damped to an acceptable level.

An object of the invention is to provide a coordinate measuring device by which vibrations of the stylus are damped in an effective and efficient way.

In order to accomplish that objective, the said elastic means comprise at least
5 one leaf spring made of conductive material, whereby said magnet means generate eddy currents in said leaf spring.

In case of vibration of the stylus with the sensing member also said leaf spring will vibrate. When a magnet is located near said leaf spring, eddy currents will be generated in the conductive material of the leaf spring. Due to the electrical conductance of the
10 material, the eddy currents have a damping effect on the movement of the leaf spring and thereby on the vibration of the stylus. Because the eddy current is generated in a leaf spring of the said elastic means, there is no need for an additional element containing the conductive material.

The expression 'leaf spring' has a broad interpretation. The leaf spring may
15 even have the shape of a bar, provided that bending the bar results in an elastic force.

Preferably, said conductive material has a high conductance and is nonmagnetic, so that the magnetic field does not exert forces on the conductive material. The material may be nonmagnetic steel, i.e. steel containing about 12% Mn. However, preferably the conductive material is aluminium or an aluminium alloy, or copper or a copper alloy.

20 In one preferred embodiment a leaf spring comprises two portions positioned inclined to each other, an outer portion connected to the support unit and an inner portion connected to the stylus. Both portions may be positioned substantially in the same plane. Preferably, the area of the transverse section of said outer portion is smaller than the area of the transverse section of said inner portion. In case both portions of the leaf spring have the
25 same thickness, the width of said outer portion is smaller than the width of said inner portion of the leaf spring.

In one preferred embodiment the elastic means comprise a number of leaf springs made out of one sheet of material, for example a sheet of aluminium. The sheet may have a thickness between 0.05 and 0.5 mm, good results are obtained by using a thickness of
30 0.18 mm. The spring member, i.e. the leaf springs, including connecting parts, may be machined out of the sheet material, but also any other method of removing material out of the sheet can be used.

Preferable, the configuration of the leaf springs of the spring member are rotational symmetric, having an axis of symmetry perpendicular to the plane of the spring

member. Thereby a number of leaf springs are positioned around a central part of the spring member, to which central part the stylus with the sensing member is attached. So, the inner ends of the leaf springs are attached to the stylus and the outer ends are attached to the support unit.

5 In one preferred embodiment the elastic means comprise two spaced apart spring members, each spring member comprising leaf springs, whereby the magnet means are located between the two spring members. Preferable, each spring member comprises a number of leaf springs made out of one sheet of material, whereby the spring members are located parallel with respect to each other. Thereby the magnet means produce a magnetic
10 field at both sides of the magnetic means, whereby each spring member is positioned in one of the magnetic fields.

 The configuration of two spring members positioned parallel to each other, each comprising leaf springs, is known from US-A-5259122. Thereby also damping means are present, comprising a viscous liquid located between the two spring members.

15 In one preferred embodiment the magnet means comprise a number of permanent magnets. Material for such permanent magnets may be cobalt steel or various ferritic alloys. Preferably, the permanent magnets are incorporated in a plate of nonmagnetic material, for example plastic, whereby the magnetic field may extend at both sides of said plate.

20 Preferably, the permanent magnets are positioned in an array, adjacent to each other. Two or more of such arrays of magnets can be positioned parallel and adjacent to each other, so that in fact a plane of permanent magnets is created. The array or plane of permanent magnets is positioned parallel to each leaf spring in which eddy currents has to be generated. The distance between the leaf spring and the magnet should be small, but there
25 must be enough space for the leaf spring to move.

 In one preferred embodiment the magnetic axes of said permanent magnets are positioned in the plane of said plate and perpendicular to the array, thereby the width of the array of magnets may be equal to the width of the relevant leaf spring.

30 The invention furthermore relates to a method for measuring the position of an object, whereby the object is contacted by a stylus of a probe, the probe comprising the stylus with a sensing member, a support unit to which the stylus is connected through elastic means, and magnet means for damping vibrations of the stylus by generating eddy currents in conductive material, whereby the elastic means comprise at least one leaf spring made of

conductive material, and whereby said magnet means generate eddy currents in said leaf spring.

5 The invention will be explained in more detail hereinafter by means of a description of an embodiment of a coordinate measuring device, in which reference is made to a drawing, in which:

Fig. 1 is a perspective view of a coordinate measuring device;

Fig. 2 shows a probe;

10 Fig. 3 shows detection means;

Fig. 4 shows a first embodiment of a spring member;

Fig. 5 shows a second embodiment of a spring member;

Fig. 6 shows a plate comprising permanent magnets; and

Fig. 7 shows an assembly of spring members and a plate comprising magnets.

15

The figures are merely schematic representations of an embodiment, in which less relevant parts are not shown.

Figure 1 shows a coordinate measuring device having a base 1, for example
20 made of granite. On the base 1 there is a first stage 2 which can move in one direction (y-direction) with respect to the base 1, as indicated by arrow 3. The measuring scale 4 shows the linear position of the first stage 2 relative to the base 1.

A second stage 5 can move in one direction (x-direction) with respect to the first stage 2, as indicated by arrow 6. The measuring scale 7 shows the linear position of the
25 second stage 5 relative to the first stage 2. And a third stage 8 can move in one direction (z-direction) with respect to the second stage 5, as indicated by arrow 9. The measuring scale 10 shows the linear position of the third stage 8 relative to the second stage 5.

The lower end of the third stage 8 carries a probe, comprising a support unit
30 13, which is attached to the third stage 8, and a stylus 14 extending downwardly from the support unit 13. The lower end of the stylus 14 carries a sensing member (not shown in figure 1) for contacting the object 15 to be measured. The stylus 14 is connected to the support unit 13 by elastic means, for example spring means, so that the stylus 14 can move with respect to the support unit 13.

By moving the first, the second and the third stages 2,5,8 with respect to each other and with respect to the base 1, the probe 13,14 can be positioned at any predetermined location relative to the base 1. Such location can be indicated by three values measured on the three measuring scales 4,7,10.

5 The object 15 to be measured is placed on the base 1 of the coordinate measuring device, which is diagrammatically shown in fig. 1. The geometry of the object 15 can be determined by measuring the exact location of certain spots on the outer surface of the object 15.

10 In order to perform such measurement the probe 13,14 is moved by moving the stages 2,5,8 in such way that the lower tip of the stylus 14 (the sensing member) abuts against the relevant spot on the surface of the object 15. Then the location of the sensing member relative to the support unit 13 is determined, so that the location of the relevant spot on the surface of the object 15 can be calculated. By repeating such measurement at different spots on the surface of the object 15, the geometry of the object 15 can be determined.

15 Figure 2 shows the support unit 13 supporting the stylus comprising a stem 17 and a sensing member 18 attached at the lower end of the stem 17. The sensing member 18 is a sphere, preferably a sapphire sphere.

20 The stylus 17,18 is suspended in the support unit 13 by elastic means 19, so that the stem 17 can move with respect to the supporting unit 13. The stem 17 will deviate from its vertical position if the sensing member 18 is abutting the surface of an object 15.

25 Because the stem 17 hinges (or moves) relative to the supporting unit 13, a detection member 22, attached at the upper end of the stem 17 will move corresponding to the movement of the sensing member 18. The support unit 13 comprises detection means 23 for measuring the position of detection member 22 relative to the support unit 13. By measuring the position of detection member 22 the location of sensing member 18 can be calculated.

30 Figure 3 shows an embodiment of the detection means 23 of the probe. The stem 17 carries at its lower end the sensing member 18 and at its upper end the detection member 22. As explained above, the location of the sensing member 18 can be calculated when the position of the detection member 22 is measured. The position of the detection member involves the location of the detection member 22 as well as its orientation.

 The detection member 22 is shaped as a pyramid having three inclined triangular surfaces 30, being mirrors. From ahead three laser beams 31 are provided through three fibers 32 and three lens systems 33. Each of the three laser beams 31 is directed to one

of the three triangular mirrors 30 of the detection member 22. The three laser beams 35 are reflected by the mirrors 30 and received by three detector screens 36. Each of the three detector screens 36 measures the location where the laser beam hits the screen.

All the components of the detections means 23: the fibers 32, the lens systems 33 and the detector screens 36, are fixed in the support unit 13. Therefore the position of the detection member 22 can be calculated based on the data coming from the three detector screens 36, i.e. the locations where each of the laser beams 35 strikes the respective detector screen 36. After the position of the detection member 22 is measured, the location of the sensing member 18 can be calculated, so that the relevant spot on the surface of the object 15 to be measured is determined.

Figure 4 shows a first embodiment of a spring member. The spring member is an assembly of three leaf springs 41 which can form the connection between the stem 17 and the support unit 13. The spring member is made out of a flat sheet (plate) of material, having a thickness of for example 0.18 mm. Material of the sheet is removed, so that a ring 42, three leaf springs 41 and a central part 43 remain. The ring 42 can be attached to the support unit 13 and the central part 43 can be attached to the stem 17, whereby the flexibility of the three leaf springs 41 provides for an elastic connection between the support unit 13 and the stylus 17,18.

Figure 5 shows a more flexible spring member. Thereby the ring 42 is connected to the central part 43 by three leaf springs, each comprising two portions, an outer portion 44 and an inner portion 45. This spring member is also made out of a sheet of material, for example a flat plate of aluminium.

Figure 6 shows a flat plate 46 of nonmagnetic material, for example plastic. The plate 46 has a circular shape having the same diameter as the spring member shown in figure 5. Near its circumference (edge) the plate 46 has a ring shaped area 47 having a greater thickness than the rest of the plate. And in the central part of the plate 46 there is a hole 48.

In the material of the plate 46 there are embedded six arrays 49,50, each consisting of a number of permanent magnets, whereby the locations and the dimensions of the arrays 49,50 corresponds to the location and the dimensions of the leaf springs 44,45 of figure 5. The three arrays 49 have the same width as the outer portions 44 of the leaf springs and the three arrays 50 have the same width as the inner portions 45 of said leaf springs. The permanent magnets are embedded in such manner that they appear at the surface of the plate 46 at both sides of that plate.

Figure 7 shows a stem 17 having a sensing member 18 at its lower end. Its upper end is carrying a detection member 22, for example formed as a pyramide as shown in figure 3. Near the detection member 22 the stem 17 is attached to the central part of the elastic means 19. The elastic means 19 comprises two spring members 52 (as they are shown in figure 5) being positioned parallel to each other, and partly shown in a sectional view. Between the two spring members 52 there is located a plate 46 (as it is shown in figure 6). Because of the ring shaped thick portion 47 of the plate 46, there is a certain predetermined distance between each of the two spring members 52 and the plate 46. In the central part of the elastic means 19 a sleeve 53 is present around the stem 17 to keep the two spring members 52 spaced apart. The two spring members 52 and the sleeve 53 are connected to the stem 17, for example, by glueing them together. The circumferential edge of elastic means 19 is attached to the support unit 13, which is not shown in figure 7.

In elastic means 19 the six leaf springs 44,45 of the two spring members 52 (shown in figure 5) extend at both sides of plate 46 (shown in figure 6), whereby the portions 44 of the leaf springs are positioned near the array 49 of permanent magnets and whereby the portions 45 of the leaf springs are positioned near array 50 of permanent magnets. In case the leaf springs 44,45 move with respect to plate 46, the magnetic field of the arrays 49,50 of permanent magnets will generate eddy currents in the leafsprings 44,45 at both sides of plate 46, and because of the electrical conductance of the material of the leaf springs, the movement of the leaf springs will be damped.

The embodiment of the coordinate measuring device as described above is merely an example; a great many other embodiments are possible.

29. 10. 2002

CLAIMS:



1. A coordinate measuring device having a probe comprising a stylus with a sensing member for contacting the object to be measured, a support unit to which the stylus is connected through elastic means, and magnet means for damping vibrations of the stylus by generating eddy currents in conductive material, characterized in that the elastic means
5 comprise at least one leaf spring made of conductive material, and in that said magnet means generate eddy currents in said leaf spring.
2. A coordinate measuring device as claimed in claim 1, characterized in that said conductive material is nonmagnetic material.
- 10 3. A coordinate measuring device as claimed in any one of the preceding claims, characterized in that the conductive material is aluminium or an aluminium alloy, or copper or a copper alloy.
- 15 4. A coordinate measuring device as claimed in any one of the preceding claims, characterized in that a leaf spring comprises two portions positioned inclined to each other, an outer portion connected to the support unit and an inner portion connected to the stylus.
- 20 5. A coordinate measuring device as claimed in any one of the preceding claims, characterized in that the elastic means comprise a number of leaf springs made out of one sheet of material.
6. A coordinate measuring device as claimed in any one of the preceding claims, characterized in that the configuration of the leaf springs are rotational symmetric, having an
25 axis of symmetry perpendicular to the plane of the leaf springs.
7. A coordinate measuring device as claimed in any one of the preceding claims, characterized in that the elastic means comprise two spaced apart spring members, each

comprising leaf springs, and in that the magnet means are located between the two spring members.

8. A coordinate measuring device as claimed in claim 7, characterized in that
5 each spring member comprises a number of leaf springs made out of one sheet of material, whereby the spring members are located parallel with respect to each other.

9. A coordinate measuring device as claimed in any one of the preceding claims,
characterized in that the magnet means comprise a number of permanent magnets.

10

10. A coordinate measuring device as claimed in claim 9, characterized in that the
permanent magnets are incorporated in a plate of nonmagnetic material.

11. A coordinate measuring device as claimed in claim 9 or 10, characterized in
15 that permanent magnets are positioned in an array, adjacent to each other.

12. A coordinate measuring device as claimed in claim 10 or 11, characterized in
that the magnetic axes of said permanent magnets are positioned in the plane of said plate and
perpendicular to the array.

20

13. A method for measuring the position of an object, whereby the object is
contacted by a stylus of a probe, the probe comprising the stylus with a sensing member, a
support unit to which the stylus is connected through elastic means, and magnet means for
damping vibrations of the stylus by generating eddy currents in conductive material,
25 characterized in that the elastic means comprise at least one leaf spring made of conductive
material, and in that said magnet means generate eddy currents in said leaf spring.

ABSTRACT:

29. 10. 2002

(90)

A coordinate measuring device having a probe comprising a stylus (14) with a sensing member (18) for contacting the object (15) to be measured, a support unit (13) to which the stylus (14) is connected through elastic means (19), and magnet means (46) for damping vibrations of the stylus (14) by generating eddy currents in conductive material. The
5 elastic means (19) comprise at least one leaf spring (41) made of conductive material, and in that said magnet means (46) generate eddy currents in said leaf spring (41).

Fig. 7

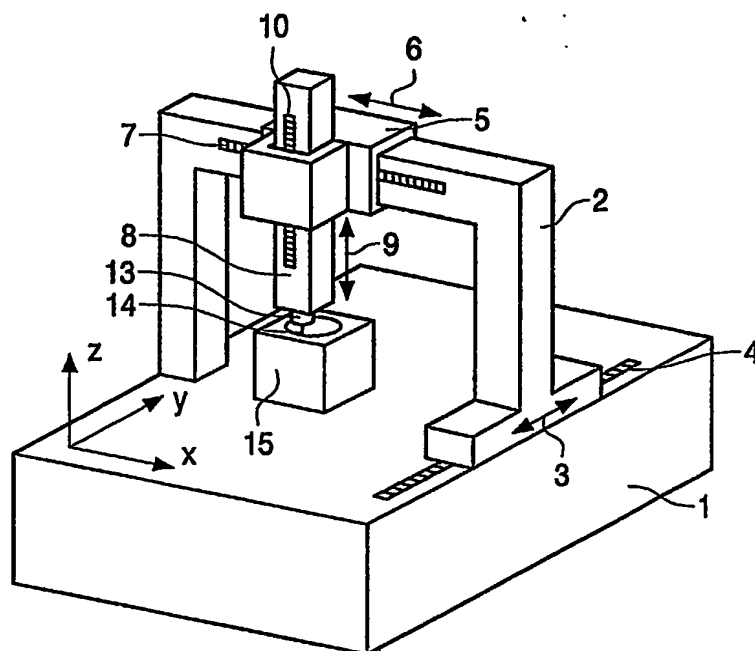


FIG. 1



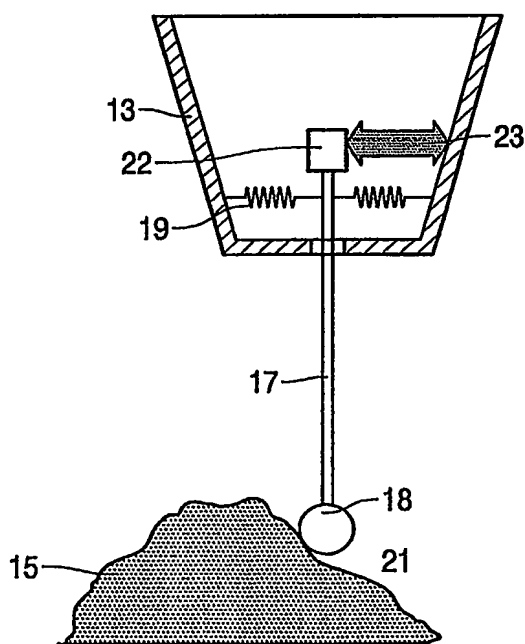


FIG. 2

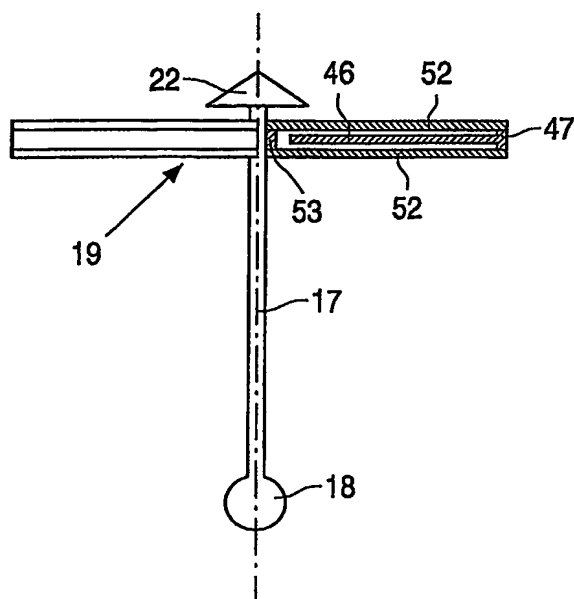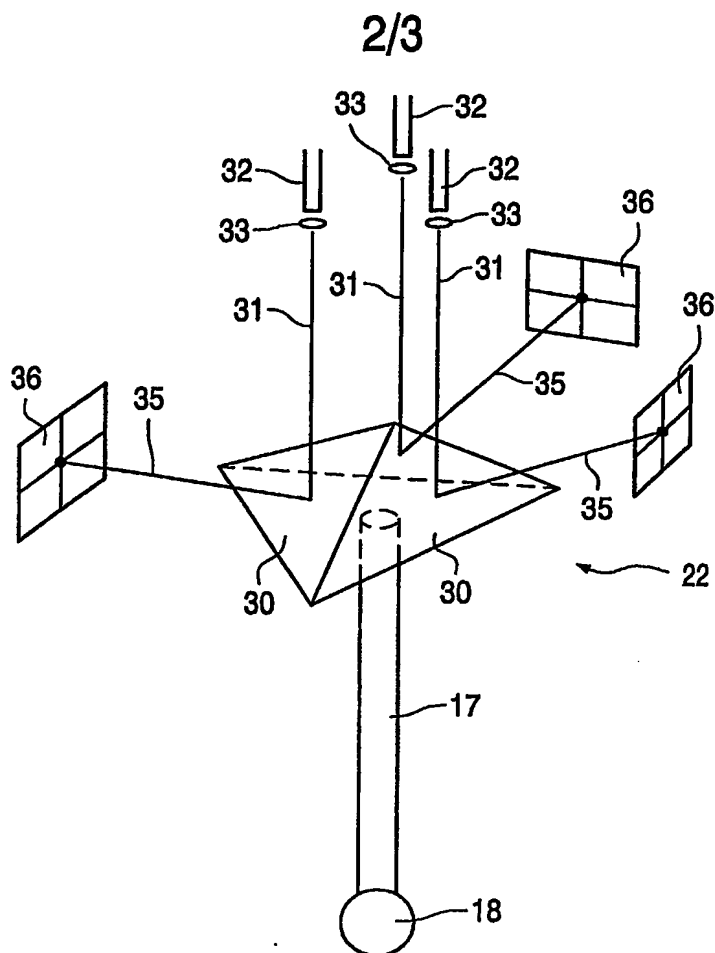

3/3

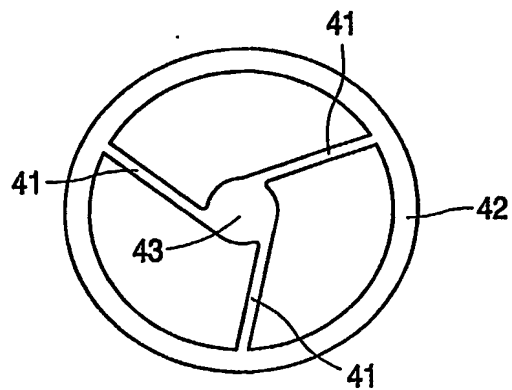


FIG. 4

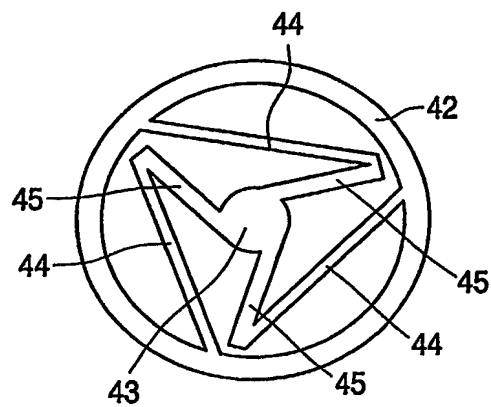


FIG. 5


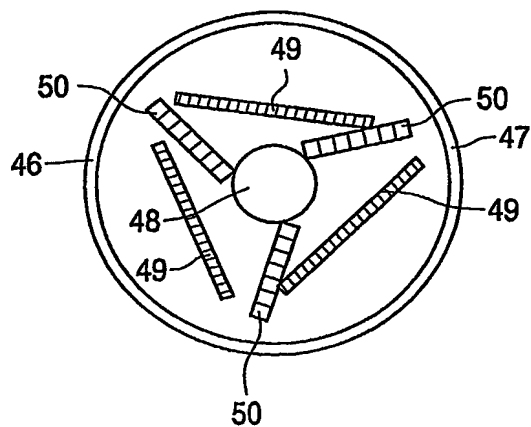


FIG. 6

PCT Application
IB0304596

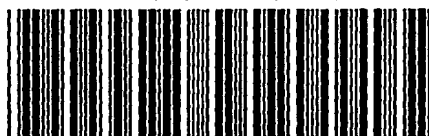

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.